


CP- UAP-SC23C

23x Cost-effective Weatherproof PTZ Dome Camera

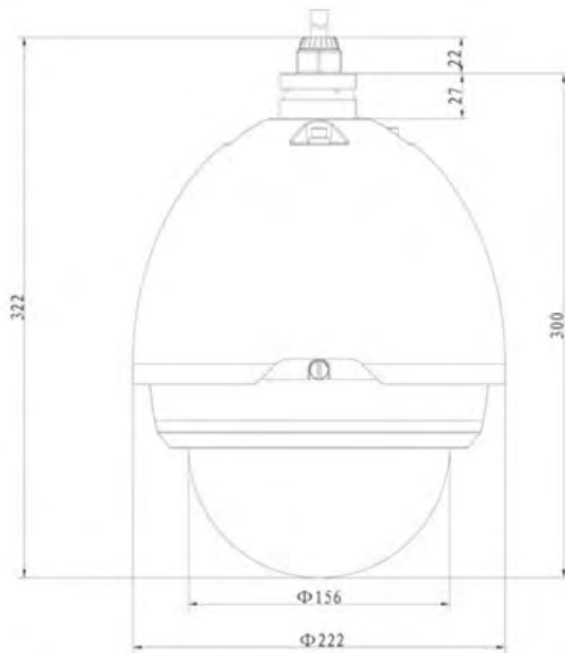

Main Features

- 1/4" HQIS
- High resolution of 540TVL
- Min. Illumination of 0.5Lux(Color) & 0.05Lux(B/W)
- Powerful 23x optical zoom
- Day/Night (ICR), 2D-DNR, Auto iris, Auto focus, AWB, AGC, BLC
- Max 300 °/s pan speed, 360° continuous pan rotation and auto flip with no blind spot monitor
- Upto 255 Presets, 5 Auto Pattern, 8 Auto Tour, 5 auto scan
- Auto recognition of general protocols Pelco-P/D
- Auto restore to previous PTZ and lens status after power failure
- IP66 all-environments protection, 4000V thunder-proof, auto constant temperature & anti-fog



CP- UAP-SC23C

23x Cost-effective Weatherproof PTZ Dome Camera

Feature

Image Sensor
 Pixels
 Resolution
 Min. Illumination
 S/N Ratio
 Electronic Shutter
 Zoom Optical
 Lens
 White Balance (AWB)
 Gain Control (AGC)
 Back Light Comp.
 Day & Night (ICR)
 Special Functions
 Pan Range
 Tilt Range
 Number of Presets
 Preset Speed
 Surge Protection
 Alarm
 Video Output
 Power Supply
 Power Consumption
 IP Rating
 Dimensions
 Weight
 Operating Temp
 Certifications

Specification

1/4" HQIS
 640H) × 480(V)
 540 TVL
 0.5Lux(Color) & 0.05Lux(B/W)
 More than 50 dB
 1/50s~1/10,000s
 23x
 3.9 mm(wide) ~ 89.7 mm (tele),
 Auto / Manual
 Auto / Manual
 ON/OFF
 Yes
 4000V thunder and wave protection
 0°~360°endless
 -2°~90° auto flip 180° to continue monitor
 255
 Horizontal: 300°/s, Vertical: 180°/s
 Yes
 Input: 2, Output: 1
 CVBS: 1.0Vp-p / 75Ω
 AC 24V/1.5A(±10%)
 15W(Indoor), 27W(Outdoor, heater on)
 IP6 IP66
 Ø222(mm) x 322(mm)
 5.0kg
 -40°C ~ 60°C
 CE, FCC and RoHS



1141 Budapest, Fogarasi út 77. 1095 Budapest, Mester u. 34.
 Tel.: *220-7940, 220-7814, 220-7959, Tel.: *218-5542, 215-9771, 215-7550,
 220-8881, 364-3428 Fax: 220-7940 216-7017, 216-7018 Fax: 218-5542
 Mobil: 30 531-5454, 30 939-9989 Mobil: 30 940-1970, 20 949-2688

www.cpplus.hu

E-mail: info@delton.hu Web: www.delton.hu

